





Designed and developed for the 1st in the world,

# Caster Wheel Cleaner

Factory Cleanliness, It begins with us.

Vol.2

① Company Profile / ② Overview (Motivation for Development) /

<sup>3</sup> Parts Name / 4 Special Features / 5 Excellence / 6 User Economics /

<sup>7</sup> Installation / 8 Performance Reliability

### 01 Company Profile



### Summary

Company Name Daeshin MC Corp., Ltd

President Mr. Young Hwan Choi

**Establish Year** May 1st, 1997

Address 46, 369beon-gil, Annam-ro, Bupyeong-gu, Incheon


Business Area Cyclone Suction Mat, Castor Wheel Cleaner, Cleaning Machines / Manufacturer, Seller

**Tel/Fax** +82-32-511-5001 Fax: +82-32-568-9903

E-mail <u>dsclean@dsclean.co.kr</u>

Homepage www.daeshinmc.co.kr/en

### **Organization Chart**

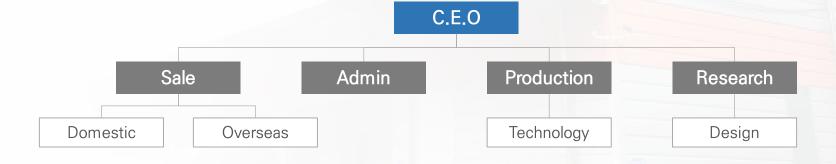

### **02 Motivation for Development**

01

### Need to Solve Workplace Pollution Problems

Severe contamination of workplace from wheels -> Wheels need to be cleaned.

02

#### **Limited Form of Previous Installation**

Manufactured and sold only In-grounded(Embedded) type Previously. -> Many Restrictions for installation

03

### Slope type is developed.

No need to dig the ground. Small carts weighed under 200kg Is available for using Slope Type .

### 02 Products Overview



In-Ground Type

(Cleaning Weight: 200kg ~ 2,000kg)



Slope Type

(Cleaning Weight: under 200kg)
: Selected of Industrial Convergence Items

### 02 Products Overview







The Washing Sponge, which always contains water and detergent, washes the wheels by spinning in the opposite direction of the wheels and wipes the wheels.

5

### 03 Parts Name





### **04 Special Features**

1. Strong cleaning power by water + detergent + sponge roller

(Reliability Assessment Test Finished)

2. Wheel-Turning Prevention Technology while it is cleaning.

(Patented Technology)

3. Automatic pushing forward wheels after cleaning


(Patented Technology)

4. Technology to easily change by one-touch when replacing washing sponge

(consumables) (patented technology)

- 5. Sludge automatic discharge and waste-water recycling technology (industrial convergence)
  - 6. Completely remove water on the wheels after cleaning

### **04 Special Features**

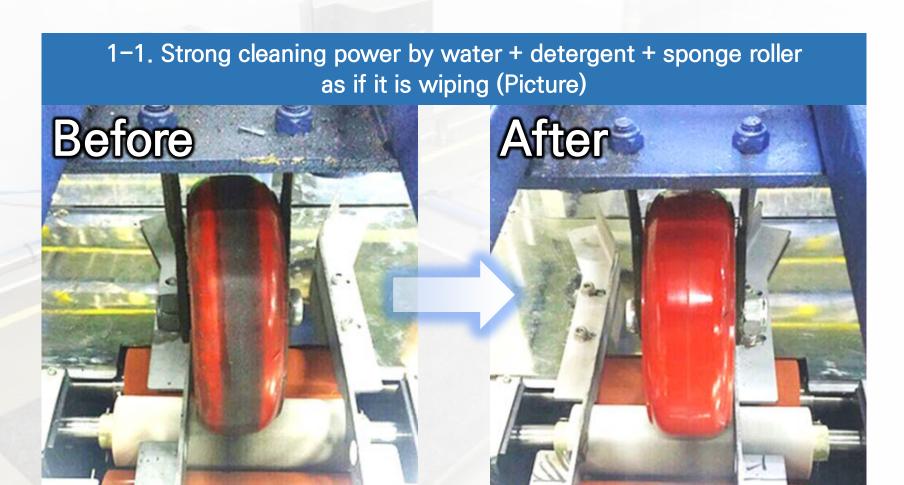

### **04 Special Features**


Tested by KIMM: Korea Institute of Machinery & Materials.

### 1-2. Strong cleaning power (Data) - "Reliability Evaluation"

#### Color Test.



#### Result

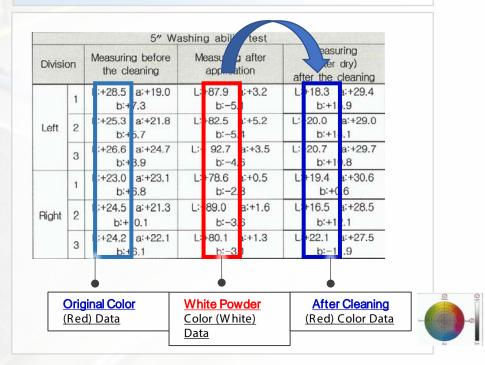

We used color tester. When we apply White Powder on the wheels as test, The color data changed, after cleaning wheels, data is back to red color data (Proved The Strong Cleaning Power)




### **04 Special Features**

### 2. Wheel-Turning Prevention Technology while it is cleaning.




1,2,3 rolls fit to wheel size => Prevent Wheel Turning

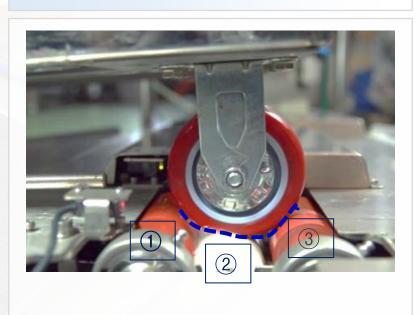



### **04 Special Features**

### 3. Automatic pushing forward wheels after cleaning

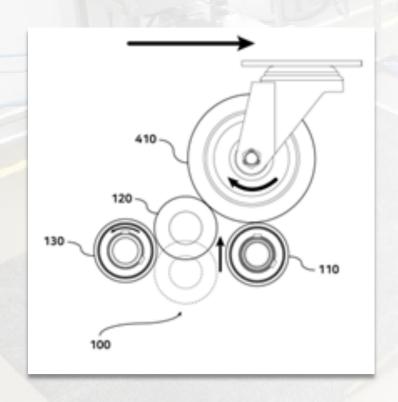


#### Safety for wheel forward



### **04 Special Features**

## 4. Technology to easily change by one-touch when replacing Washing Roller



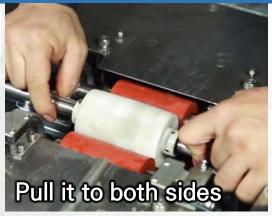




### **04 Special Features**

### 5. Automatic sludge discharge and waste-water recycling technology

### **Automatic Sludge Discharge**


① Water and detergent are automatically sprayed to Washing Sponge → Cleaning Wheels

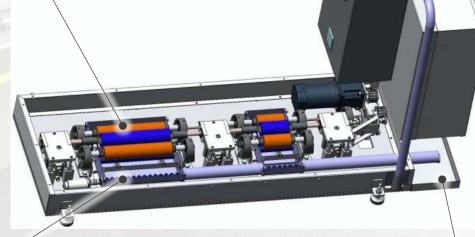

2 After cleaning wheels, waste water and sludge are generated  $\rightarrow$  Screw brings those to Sludge Bag

③ Sludge is collected to Sludge Bag


Recycling Technology

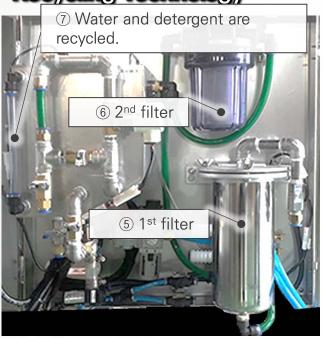

4 Waste water is pumped to 1st and 2nd filters and recycled

### **04 Special Features**

### 6. Completely remove water on the wheels after cleaning

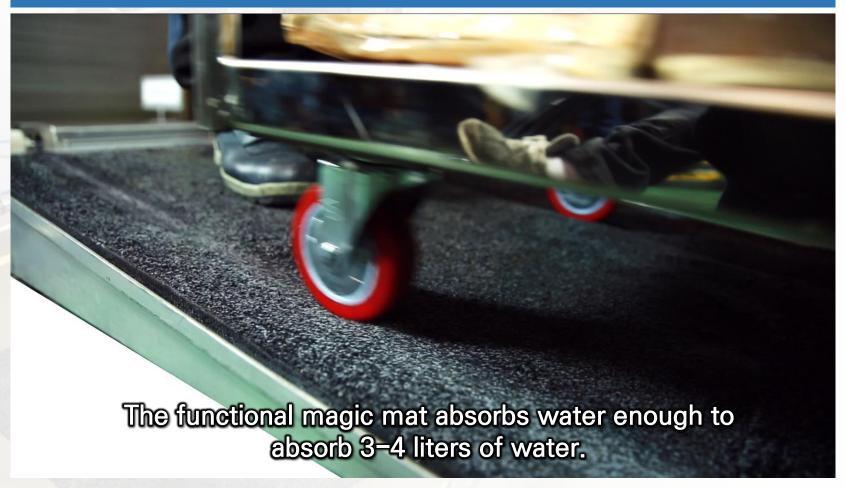

### 04 Special Features - Reliability Assessment Test

#### **Electric Shock Safety**



After applying the 500V voltage test, check the high insulation resistance of "76  $G\Omega$ "!

Electric shock rate: Low Electric Shock Safety Certified!

Source: KIMM

### Sponge Roller Life Test



5" Wheel Sponge Roller Life Test:

The Sponge is torn

"At 2614

Cycle!"

Very High Cycle! Source: KIMM

### Temperature Dependent



#### **Normal Operation**

Temperature(2 °C ~55 °C) Source: KIMM

#### Noise



# Excellent for indoor use with 59 Db! Source: KTL

Sample		Noise measurement test			
	Division	Point 1	Point 2	Point 3	
Amb	ient noise	52.7	52.6	53.0	
1	Noise	66.6	66.1	66.5	

### Sponge Roller Life Test



6" Wheel Sponge Roller Life Test:

The Sponge is torn

"At 8710

Cycle!"

Very High Cycle! Source: KIMM

Tested by KIMM: Korea Institute of Machinery & Materials.

### 05 Excellence

Evaluation Lists	Evaluation Methods	Description	
Dimension(Slope)	A TYPE B TYPE	1900 x 3000 x 950mm 2250 x 3000 x 950mm	
Capacity	Operating Setting Time	720 carts /day (2 carts/min)	
Allowable Weight	Slope Type	200kg	
Safety	Automatic pushing forward wheels	After cleaning the wheel, Auto forward	
	Automatic Spray	Water and Detergent Auto Input and Spray	
Efficiency of Cleaning	Cleaning Power	Most Strong Cleaning Power as if it is wiping	
_	Cleaning Methods	Brush Roller and Sponge Roller	
	Washing Roller Replacement	One- Touch Exchange	
Convenience of	Waste Water Recycled	Waste water pumped into filters and auto recycled	
Maintenance	Automatic Sludge move	Sludge is auto collected in Sludge Bag	
	Time Setting	Various operation settings such as cleaning timer (control panel)	
Wheel Turning Prevention Patented		Patented	

### 06 User Economics – Estimated Cost per Month

**VS** 

#### Caster Cleaner - (20days/month, 6hrs/day) cost

Content	Content Usage		Remarks	
Waste Water	2,160L	200,000	1,000L=105,000won (If use Recycling System: 1/4 cost reduced)	
Detergent	Detergent 16,800ml 2		10L=100,000won	
Electricity	120Kw	20,000	1Kw=150won	
Washing Roller	4sets	200,000	1set=1week ( 500 carts/day cleaning standard)	
Tot	al	620,000 won	Estimated cost per month	

### Cleaning Labor Cost without Caster Cleaner – Month(20days)

Content	People	Cost(won)	Remarks
Labor Cost	4	2,400,000 won	〈Reference: Auto Parts Company Monthly Cost before using Caster Cleaner〉
Total		9,600,000 won	Monthly Cost

#### ⟨ References ⟩ Estimated Cost per Month : Direct Drain Waste Water

Time	Cleaning Carts	Waste Water	Detergent	Electricity
30(sec)	1 cart	150ml	0.2ml	
1(min)	2 carts	300ml	0.4ml	1Kw
60(min)	120 carts	18,000ml	24ml	
360min (6hrs)	720 carts	108,000ml	840ml	6Kw
Month (20days)	14,400 carts	2,160L	16,800ml	120Kw

### 07 Installation



#### In-Ground Type (Cart weight 200kg ~ 2,000kg)



Auto Parts Company



Semiconductor Company



**Auto Parts Company** 




Semiconductor Company (Samsung SDI- Vietnam)

#### Slope Type (Cart weight Below 200kg)



Chemical Company



Semiconductor Company (Haesung DS)



Cosmetic Company



Plastic Company

### **07** Performance Reliability



Quality Management System



Venture company certificate



Environmental management system



R & D
Dedicated Department
Certificate




Electromagnetic Compatibility NO: 18-019565-01-1



Promising Export Certificate of Small and Medium Business



CE NO: K11559/M18



Industrial Convergence Item Confirmation NO: 2019–693



### 07 Performance Reliability - Patents



Domestic patent Washing Equipment-In Ground Type



Domestic patent Washer-Slope



Domestic patent Water Removal





## Thank You

As developed 1st Caster Wheel Cleaning System is an essential equipment for workplace environment.

